

**BRINGING
LIGHT TO
EVERY
MOMENT**



Manufactured By

ADC ADNAN
CORPORATION

ORIENT LIGHTING

Lighting
REIMAGINED

CATALOGUE 2026-27



+92-300-1674368



Adnan Corporation,
Gate # 2 26 Km, Main
Multan Road, Lahore



sales@orientlighting.pk
www.orientlighting.com.pk



ABOUT US

Our journey began in 1998 when we introduced global lighting leaders GE and Osram to the Pakistani market. We were not just distributors we were building the foundation for modern lighting in Pakistan, setting benchmarks for quality, reliability, and customer trust. This early partnership gave us unmatched experience in global standards and the lighting industry's evolving needs.

By 2006, we transformed that experience into our own vision launching Orient Lighting. Backed by Adnan Corporation, By 2024 we established a fully integrated manufacturing ecosystem with in-house SMT PCB assembly, injection molding, and PC extrusion. This gave us complete control over design, quality, and cost allowing us to create products tailored specifically for Pakistan's unique environments and energy requirements.

Today, Orient Lighting stands as a symbol of innovation, durability, and local manufacturing excellence. Serving residential, commercial, and industrial sectors, we deliver lighting solutions trusted by architects, retailers, and distributors nationwide. With every product, we uphold our promise: world-class lighting, built in Pakistan.

OUR LEADERSHIP

M. Sohail Amjad - Founder

The visionary behind Adnan Corporation, he laid the foundation of a company built on innovation, quality, and global outlook.

Nazi Sohail - Managing Director

Providing strategic oversight and governance, she plays a key role in steering long-term organizational growth and excellence.

M. Haseeb Sohail - Executive Director

Focused on innovation, brand strategy, and business expansion, Haseeb drives the company's forward momentum into new markets and technologies.

M. Momin Sohail - Director Operations

Leading sales, marketing and supply chain functions, Momin ensures seamless operations, quality assurance, and production efficiency across all product lines.

Muhammad Usman - GM Sales & Marketing

Leading sales and marketing initiatives to build strong brands and deliver measurable growth.



MISSION & VISION

To engineer and deliver world class lighting solutions through complete in house manufacturing combining global standards, local insight, and customer-centric innovation to empower every layer of Pakistan's lighting ecosystem.

To become Pakistan's most trusted and innovative lighting brand expanding regionally while leading in design, performance, and vertical manufacturing excellence.

TABLE OF CONTENT

1. BULBS

CAROL SERIES
T SERIES BULB

2. DOWNLIGHTS

BLUE MOON
BRIGHT MOON
ANTI GLARE DEEP SPOT
VIORA SERIES

3. BACK LIT PANELS

IGNIS RECESSED
IGNIS SURFACE
IGNIS PRO SERIES
MOON LIGHT RECESSED
MOON LIGHT SURFACE
2X2 CILING PANEL
1X4 CILING PANEL

4. BATTENS & ROD

T8 LED TUBE ROD
T5 LED BATTEN SQUARE
T5 LED TUBE ROD
UNI BODY SERIES
TRI PROOF



5. BULK HEAD LAMPS

6. GRILLE LIGHT

GRILLE T1
GRILLE RT 2

7. TRACK LIGHTS

8. HIGH BAY

9. FLOOD LIGHTS

EVO LUX
PRO LUX

10. STREET LIGHTS

ECO SERIES
ADVAN LUX SERIES



Our commitment to quality is backed by globally recognized certifications. Orient products comply with ISO 9001:2015, RoHS, UL Listed, & CE standards ensuring safety, sustainability, and reliability. Every product we deliver is built to meet international benchmarks and



BULB SERIES

www.orientlighting.com.pk



CAROL SERIES

1 YEAR
WARRANTY

MODEL NO	WATTS	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-BA03C	03 W	285	3000k/4000k/6500k	50	60X 112 mm
OL-BA12C	12 W	1140	3000k/4000k/6500k	50	65 x 117 mm
OL-BA18C	18 W	1710	3000k/4000k/6500k	50	80 x 152 mm
OL-BA24C	24 W	2280	3000k/4000k/6500k	50	95 x 164 mm



APPLICATIONS



home



shop



office



restaurant



T-SERIES BULB

MODEL NO	WATTS	LUMINOUS FLUX	BASE / SIZE	CCT	QTN/CTN	SHAPE	DIMENSIONS
OL-HP25T	25 W	2375	E27 / B22	3000k/4000k/6500k	50	T 80	80 x 139
OL-HP35T	35 W	3325	E27 / B22	3000k/4000k/6500k	20	T 100	11 x 176
OL-HP45T	45 W	4275	E27 / B22	3000k/4000k/6500k	20	T 120	120 x 205
OL-HP55T	55 W	5225	E27 / B22	3000k/4000k/6500k	10	T 140	140 x 252



APPLICATIONS



home



shop



office



restaurant



DOWN LIGHTS

www.orientlighting.com.pk



BLUE MOON



MODEL NO	WATTS	LED TYPE	CCT	LUMINOUS FLUX	BEAM ANGLE	HOLE SIZE
OL-DL07LS	07 W	SMD / COB	2700K-4000K-6500K	580	120°	Ø90mm
OL-DL12LS	12 W	SMD / COB	2700K-4000K-6500K	960	120°	Ø90mm
OL-DL12LS6	12 W	SMD / COB	2700K-4000K-6500K	960	120°	Ø150mm
OL-DL18LS	18 W	SMD / COB	2700K-4000K-6500K	1440	120°	Ø200mm

PF 0.6	IP 20	CRI CRI≥80	2.5KV
60 COB	100 SMD	25000 H	85-256

APPLICATIONS



shop



restaurant



hotel



museum



lobby



BRIGHT MOON SERIES



WATTS	VOLTAGE	LED TYPE	CCT	LUMINOUS	CRI	BEAM ANGLE	LIFE	HOLE SIZE
05 W	AC 90 - 260V	SMD / COB	2700K-4000K-6500K	250	≥ 70	120°	25000 HRS	Ø75mm
07 W	AC 90 - 260V	SMD / COB	2700K-4000K-6500K	500	≥ 70	120°	25000 HRS	Ø75mm
12 W	AC 90 - 260V	SMD / COB	2700K-4000K-6500K	840	≥ 70	120°	25000 HRS	Ø90mm
18 W	AC 90 - 260V	SMD / COB	2700K-4000K-6500K	1260	≥ 70	120°	25000 HRS	Ø165mm
24 W	AC 90 - 260V	SMD / COB	2700K-4000K-6500K	1680	≥ 70	120°	25000 HRS	Ø165mm

PF 0.6	IP 20	CRI CRI≥80	2.5KV
60 COB	100 SMD	25000 H	85-256

APPLICATIONS



shop



restaurant



hotel



museum




lobby



ANTI GLARE SPOT LIGHT

MODEL NO	WATTS	REFLECTOR	CCT	LUMINOUS FLUX	CUT OUT SIZE	QTN/CTN
OL-SL03DSW/SE	03 W	White/ Bronze	3000K-4000K	220	64mm	50
OL-SL07DSW/SE	07 W	White/ Bronze	3000K-4000K	560	80mm	50

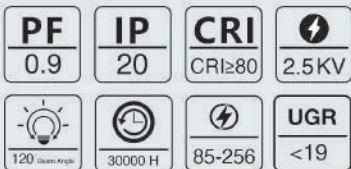


APPLICATIONS




VIORA SERIES

MODEL NO	WATTS	LED TYPE	CCT	LUMINOUS FLUX	CUT OUT SIZE	QTN/CTN
OL-DL07VRS/RC	07 W	SMD / SPOT	6500K-4000K-3000K	700	3 - 4 inch	50
OL-DL12VRS/RC	12 W	SMD / SPOT	6500K-4000K-3000K	1200	4 - 5 inch	30
OL-DL18VRS/RC	18 W	SMD / SPOT	6500K-4000K-3000K	1800	6 - 7 inch	20

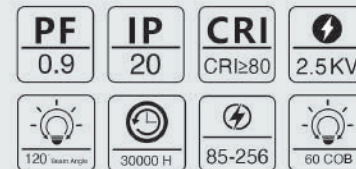

APPLICATIONS





BACK LIT PANELS

www.orientlighting.com.pk



IGNIS SERIES RECESSED PANEL

1 YEAR
WARRANTY

MODEL NO	WATTS	SHAPE	LUMINOUS FLUX	CCT	QTN/CTN	DIMENTIONS	CUTOUT
OL-RPL05ISRD	07 W	Round	630	3000k/4000k/6500k	50	98 x 30mm	70mm
OL-RPL07ISRD	07 W	Round	630	3000k/4000k/6500k	50	120 x 30mm	100mm
OL-RPL12ISRD/SQ	12 W	Round/Square	1200	3000k/4000k/6500k	60	170 x 30mm/140 x 140 x 30mm	155mm /155 x 155mm
OL-RPL18ISRD/SQ	18 W	Round/Square	1800	3000k/4000k/6500k	30	225 x 30mm/175 x 175 x 30mm	205 mm/205 x 205mm
OL-RPL24ISRD/SQ	24 W	Round/Square	2400	3000k/4000k/6500k	20	300 x 30/220 x 220 x 30mm	280mm/280 x 280mm



APPLICATIONS



home



shop




office



restaurant



lobby

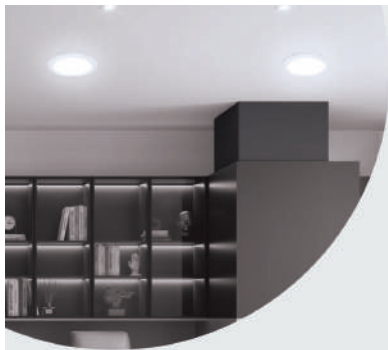

IGNIS SERIES SURFACE PANEL


MODEL NO	WATTS	SHAPE	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-SPL12ISRD/SQ	12 W	Round/ Square	1200	3000K/4000k/6500k	60	140 x 30/140 x 140 x 30
OL-SPL18ISRD/SQ	18 W	Round/ Square	1800	3000K/4000k/6500k	30	175 x 30/175 x 175 x 30
OL-SPL24ISRD/SQ	24 W	Round/ Square	2400	3000K/4000k/6500k	20	220 x 30/220 x 220 x 30

FEATURES:

- Equipped with New Backlight Technology, delivering uniform illumination, reduced glare, and enhanced visual comfort.
- PPT housing with advanced DOB heatsink technology, designed to ensure superior heat dispersion.



APPLICATIONS

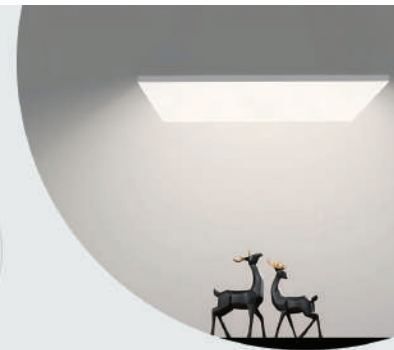


IGNIS PRO SERIES SURFACE PANEL

MODEL NO	WATTS	SHAPE	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-SPL24IIPRD/SQ	24 W	Round/Square	2400	3000k/4000k/6500k	30	175 x 36/170 x 170 x 40
OL-SPL36IIPRD/SQ	36 W	Round/Square	3600	3000k/4000k/6500k	20	220 x 36/220 x 220 x 40

FEATURES:

- **Backlight Technology** – Delivering **high lumens** with bright, uniform illumination and reduced glare for a comfortable visual experience.
- **Polycarbonate Housing & Diffuser** – Crafted with premium materials and advanced DOB heatsink technology to ensure superior heat management, durability, and reliable performance.
- **Rimless Design** – A sleek, modern design that enhances aesthetics while blending seamlessly with any environment.

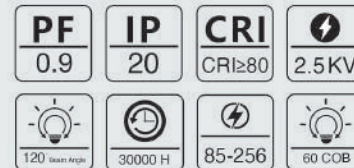

APPLICATIONS





MOON LIGHT RECESSED



MODEL NO	WATTS	LUMINOUS FLUX	CCT	CUTOUT SIZE	QTN/CTN	DIMENSIONS
OL-RBL12RD	12 W	1080	3000k/4000k/6500k	50 - 70	100	Φ90*20(H)
OL-RBL18RD	18 W	1620	3000k/4000k/6500k	50- 90	72	Φ123*20(H)
OL-RBL24RD	24 W	2160	3000k/4000k/6500k	50 -130	30	Φ175*20(H)
OL-RBL36RD	36 W	3240		50 - 190	18	Φ225*20(H)



APPLICATIONS



MOON LIGHT SURFACE



MODEL NO	WATTS	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-SBL18RD	18 W	1620	3000k/4000k/6500k	72	Φ120*30(H)
OL-SBL24RD	24 W	2160	3000k/4000k/6500k	32	Φ170*30(H)
OL-SBL36RD	36 W	3240	3000k/4000k/6500k	16	Φ225*33(H)



APPLICATIONS





2X2 CEILING PANEL



MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	LUMINOUS FLUX TOLERANCE	CCT	QTY/CTN	DIMENSIONS
OL-PL36SQ	36 W	120 lm/w	4320	±10%	3000K/4000K/6500K	5	600 X 600 X 25
OL-PL48SQ	48 W	120 lm/w	5760	±10%	3000K/4000K/6500K	5	600 X 600 X 25

FEATURES:

- **Housing Material:** Aluminum frame, robust and corrosion-resistant
- **Optical Cover Material:** Polycarbonate optical lens
- **Installation:** Recessed type, suitable for standard ceiling applications

PF 0.9	IP 20	CRI CRI≥80	4 KV
120° beam angle	30000 H	85-256	UGR <19



APPLICATIONS



office



lobby

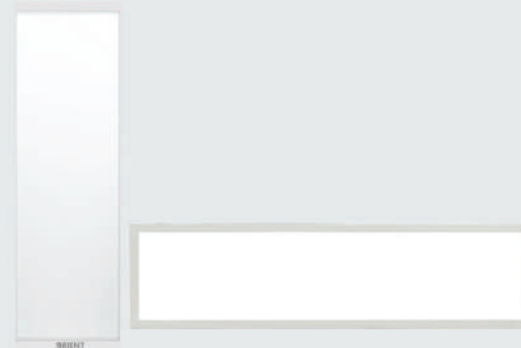

TILE PANEL 1X4



MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	LUMINOUS FLUX TOLERANCE	CCT	QTY/CTN	DIMENSIONS
OL-PL48RT	48 W	120 lm/w	5760	±10%	3000K/4000K/6500K	5	300 X 1200 X 25

FEATURES:

- **Housing Material:** Aluminum frame, robust and corrosion-resistant
- **Optical Cover Material:** Polycarbonate optical lens
- **Installation:** Recessed type, suitable for standard ceiling applications

PF 0.9	IP 20	CRI CRI≥80	2.5 KV
120° beam angle	25000 H	85-256	UGR <19

APPLICATIONS



HOTEL



OFFICE





BATTEN & RODS

www.orientlighting.com.pk



T5 LED BATTEN SQ/RD



MODEL NO	WATTS	CONNECTION TYPE	LUMINOUS FLUX	CCT	LUMINOUS EFFICACY	QTN/CTN	DIMENSIONS
OL-T508RDC/s SQC/s	06 W	Center/side	100 lm/w	600	3000K/4000k/6500k	25	300 X 68
OL-T510RDC/s SQC/s	10 W	Center/side	100 lm/w	1000	3000K/4000k/6500k	25	600 X 68
OL-T518RDC/s SQC/s	18 W	Center/side	100 lm/w	1800	3000K/4000k/6500k	25	1200 X 68

FEATURES:

- **Polycarbonate Housing:** Lightweight, impact-resistant, and built for long-lasting performance
- Available in center connection and side connection(Linkable)



APPLICATIONS



shop



restaurant



hotel



museum



lobby



T8 LED TUBE ROD

MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-TA10P	10 W	100 lm/w	1000	3000K/4000k/6500k	25	26 X 600
OL-TP20A	20 W	100 lm/w	2000	3000K/4000k/6500k	25	26 X 1200
OL-TP30A	30W	100 lm/w	3000	3000K/4000k/6500k	25	26 X 1200



APPLICATIONS



shop



restaurant



hotel



museum



lobby




ASTRO SERIES DOUBLE BATTEN

MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	CCT	QTY/CTN	DIMENSIONS
OL-DB20U	20 W	100 lm/w	2000	3000K/4000k/6500k	15	28 X 55 X 600
OL-DB40U	40 W	100 lm/w	4000	3000K/4000k/6500k	15	28 X 55 X 1200
OL-DB60U	60W	100 lm/w	6000	3000K/4000k/6500k	15	28 X 66 X 1200

FEATURES:

- **Housing Material:** High-strength polycarbonate body with aluminum inner shell for durability and efficient heat management
- **Installation:** Surface-mounted design

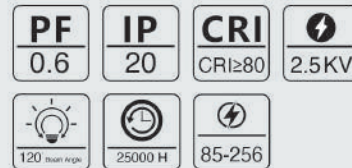

APPLICATIONS



shop



restaurant



hotel



museum



lobby



TRI PROOF BATTEN

MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	CCT	QTY/CTN	DIMENSIONS
OL-TP30A	30 W	120 lm/w	3600	3000K/4000k/6500k	15	65 X 53 X 600
OL-TP40A	60 W	120 lm/w	7200	3000K/4000k/6500k	15	65 X 53 X 1200
OL-TP40A	90 W	120 lm/w	10,800	3000K/4000k/6500k	15	65 X 53 X 1200

FEATURES:

- **Housing Material:** Polycarbonate housing with aluminum inner shell
- **Installation:** Surface-mounted design
- **Protection Features:** Damp-proof, waterproof, corrosion-resistant, IK07 impact-rating, and integrated with SPD (Surge Protection Device).



APPLICATIONS



home



shop



office



restaurant



BULK HEAD LAMPS

www.orientlighting.com.pk



BULK HEAD LAMP

MODEL NO	WATTS	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-BHL24RD	24 W	2280	3000k/4000k/6500k	25	200 X 55
OL-BHL24OV	24 W	2280	3000k/4000k/6500k	25	230 X 113 X 55



APPLICATIONS



shop



restaurant



hotel



museum



GRILLE LIGHT

www.orientlighting.com.pk



GRILLE T1

MODEL NO	WATTS	LUMINOUS FLUX	CCT	QTY/CTN	DIMENSIONS
OL-GL06A	10 W	1100	3000K/4000K/6500K	50	600 X 600 X 25
OL-GL12A	20 W	2200	3000K/4000K/6500K	20	600 X 600 X 25
OL-GL22A	30 W	3300	3000K/4000K/6500K	10	



APPLICATIONS



GRILLE RT 2

MODEL NO	WATTS	LUMINOUS FLUX	CCT	QTY/CTN	DIMENSIONS
OL-DB20U	10 W	1100	3000k/4000k/6500k	50	135 X 60 X 35
OL-DB40U	20 W	2200	3000k/4000k/6500k	20	268 X 60 X 35
OL-DB60U	30 W	3300	3000k/4000k/6500k	10	400 X 60 X 35



APPLICATIONS





TRACK LIGHTS

www.orientlighting.com.pk



TRACK LIGHT

2 YEAR
WARRANTY

MODEL NO	WATTS	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-TL10U	10 W	1000	3000k/4000k/6500k	30	60*120mm
OL-TL20U	20 W	2000	3000k/4000k/6500k	20	66*140mm
OL-TL30U	30 W	3000	3000k/4000k/6500k	20	74*168mm



APPLICATIONS



home



shop



office




restaurant



HIGH BAY

www.orientlighting.com.pk

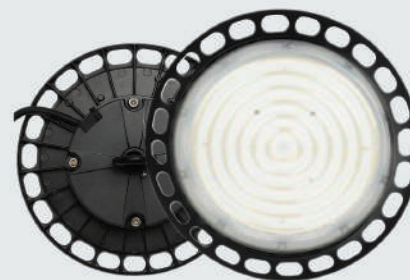

LED HIGH BAY LIGHT

**2 YEAR
WARRANTY**

MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-HB100R	100 W	140 lm/w	14000	3000K/4000k/6500k	5	292x168
OL-HB150R	150 W	140 lm/w	21000	3000K/4000k/6500k	5	342x172
OL-HB200R	200 W	140 lm/w	28000	3000K/4000k/6500k	5	382x175

FEATURES:

- **High Lumen Output** – Ensures superior brightness with wide and uniform area coverage
- **Housing Material** – Die-cast aluminium body for excellent heat dissipation and durability
- **Optical Lens** – Polycarbonate lens for optimal light distribution
- **Finish** – Powder-coated surface for enhanced protection and aesthetics
- **Protection Rating** – IP66 waterproof, dustproof, and corrosion-resistant
- **Impact Resistance** – IK08 rated for robust performance in demanding environments



APPLICATIONS



factories



warehouses



terminals



halls



FLOOD LIGHTS

www.orientlighting.com.pk



EVO LUX SERIES FLOOD LIGHT

1 YEAR WARRANTY

MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-FL30EL	30 W	120 lm/w	3600	3000K/4000K/6500K	5	130 X 36 X 150
OL-FL50EL	50 W	120 lm/w	6000	3000K/4000K/6500K	5	165 X 36 X 203
OL-FL100EL	100 W	120 lm/w	12000	3000K/4000K/6500K	5	215 X 36 X 275
OL-FL150EL	150 W	120 lm/w	18000	3000K/4000K/6500K	5	255 X 40 X 335

FEATURES:

- **Housing Material** – Die-cast aluminium body for superior heat dissipation
- **Optical Lens** – Polycarbonate lens for precise and efficient light distribution
- **Finish** – Powder-coated body for enhanced corrosion resistance and sleek appearance
- **Protection Rating** – IP66 rated for waterproof, dustproof, and weather-resistant performance



APPLICATIONS





PRO LUX SERIES FLOOD LIGHT

MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	CCT	QTN/CTN	DIMENSIONS
OL-FL50PL	50 W	140 lm/w	7000	3000K/4000K/6500K	5	229 X 188 X 40
OL-FL100PL	100 W	140 lm/w	14000	3000K/4000K/6500K	5	285 X 245 X 45
OL-FL150PL	150 W	140 lm/w	21000	3000K/4000K/6500K	5	340 X 277 X 55

FEATURES:

- **High Lumen Output** – Delivers intense brightness with wide, uniform light coverage for maximum visibility
- **Housing Material** – Heavy-duty die-cast aluminium body for exceptional strength and efficient heat dissipation
- **Lens** – Frosted glass lens for smooth, glare-free light diffusion
- **Finish** – Black powder-coated surface for superior corrosion protection and premium aesthetics
- **Protection Rating** – IP66 rated for waterproof, dustproof, and weather-resistant performance
- **Reliability** – Built for heavy-duty applications with an extended warranty for assured long-term performance



APPLICATIONS



factories



warehouses



grounds



halls



STREET LIGHTS

www.orientlighting.com.pk



1 YEAR WARRANTY

EVO LUX STREET LIGHT

MODEL NO	WATTS	LUMINOUS EFFICACY	LUMINOUS FLUX	CCT	QTY/CTN	DIMENSIONS
OL-STL50EC	50 W	120 lm/w	6000	3000K/4000k/6500k	10	460 X 131 X 73
OL-STL50EC	100 W	120 lm/w	12000	3000K/4000k/6500k	10	520 X 146 X 75
OL-STL50EC	150 W	120 lm/w	18000	3000K/4000k/6500k	10	580 X 156 X 75

FEATURES:

- **High Lumen Output** – Provides bright, uniform illumination for wide roadway coverage
- **Housing Material** – High-pressure die-cast aluminium body for superior strength and durability
- **Finish** – Corrosion resistant powder-coated surface for long-lasting protection
- **Waterproofing** – Equipped with heat resistant silicone rubber gasket ensuring IP66-rated sealing
- **Optical Lens** – Polycarbonate lens for precise and efficient light distribution
- **Design** – Engineered for reliability and performance in all weather conditions



APPLICATIONS



High- Efficacy LED Light Source



Optional SPD



ADVAN LUX



STRUCTURE & ANALYSIS



Power turn off protector

When the lamp maintenance, Open lamp flash, Internal power lamp Protect the safety of personnel.

LED POWER SUPPLY



+ NON-DIMMABLE

High-end MeanWell XLG Series LED driver, optimal stability, performance and lifespan.

ORIENT LIGHTING

High-end programmable Orient Lighting LED driver, 6KV/10KV surge protection, Provide excellent performance and lifespan.

ZP SURGE

Protection Device

Top brand SPD with high-quality, reliable, and durable advantages.



High-efficiency LED light source

Lumileds 3030 2D Greater than 150lm/W high efficacy, illuminaon grade LED light source. Lumileds 5050 Greater than 185lm/W high efficacy, illuminaon grade LED light source.



Model No.		AdvanLux01	AdvanLux02	AdvanLux03	AdvanLux04	AdvanLux05	AdvanLux06	AdvanLux07	AdvanLux08	AdvanLux09
Material	Housing	ADC12 Die – casting Aluminum								
	Optics	Tempered Glass and Polycarbonate Optical Lens								
Finish		Powder Coating								
Protection Class		Class I/ Class 2 optional								
Operating Temperature		-30°C to +50°C (-22°F to +122°F)								
IP Rating		IP65								
IK Rating		IK08								
Production Dimension(mm)		471×196×86	471×196×86	527×196×87	527×196×87	537×244×87	537×244×87	590×244×87	590×244×87	590×244×87
Luminaire Net Weight(kg)		2.34	2.34	2.64	2.64	2.89	2.89	3.15	3.15	3.15
Export Carton Size(cm)		48×20×10	48×20×10	52×25.5×10	52×25.5×10	57×26.5×10	57×26.5×10	65×28×10.5	65×28×10.5	65×28×10.5
Gross Weight(kg)		2.81	2.81	2.81	2.81	3.09	3.09	3.47	3.47	3.47
Installation Method		Spigot (Adjustable Angle)								
Intelligent Control		Photocell								
Accessory	Warranty	5 Years								
		Zhaga Socket								
		Wall mount bracket								
		NEMA Socket – 3pin/5pin/7pin								
		Photocell								
		Short Cap								

OUR PROUD CUSTOMERS

HBL

